

Disassembling the Netra t1 Model 105

Before you start to disassemble the system, study and follow the steps and cautions in panel 3 to avoid damage to the system and ensure safety.



Electrostatic Discharge

This system contains electronic parts that are extremely sensitive to static electricity. Do not touch any metal parts. Wear a wrist strap.




Only qualified personnel must replace the power supply or test the system with the top cover open.



Caution - On Sun CPU boards, there is a lithium battery moulded into the real-time clock, SGS number M4T28-BR12SH1. Batteries are not customer replaceable parts. They may explode if mishandled. Do not dispose of the battery in fire. Do not disassemble it or attempt to recharge it.

Key

- 1 Processor cover
- 2 PCI card
- 3 Mid baffle
- 4 CD-ROM drive board and cable
- 5 Cover
- 6 Hard disk drive
- 7 CD-ROM drive (replaces 8)
- 8 Blanking plate (replaces 7)
- 9 Front bezel
- 10 Grille
- 11 Power supply
- 12 Internal SCSI cable
- 13 Processor board
- 14 Internal serial cable

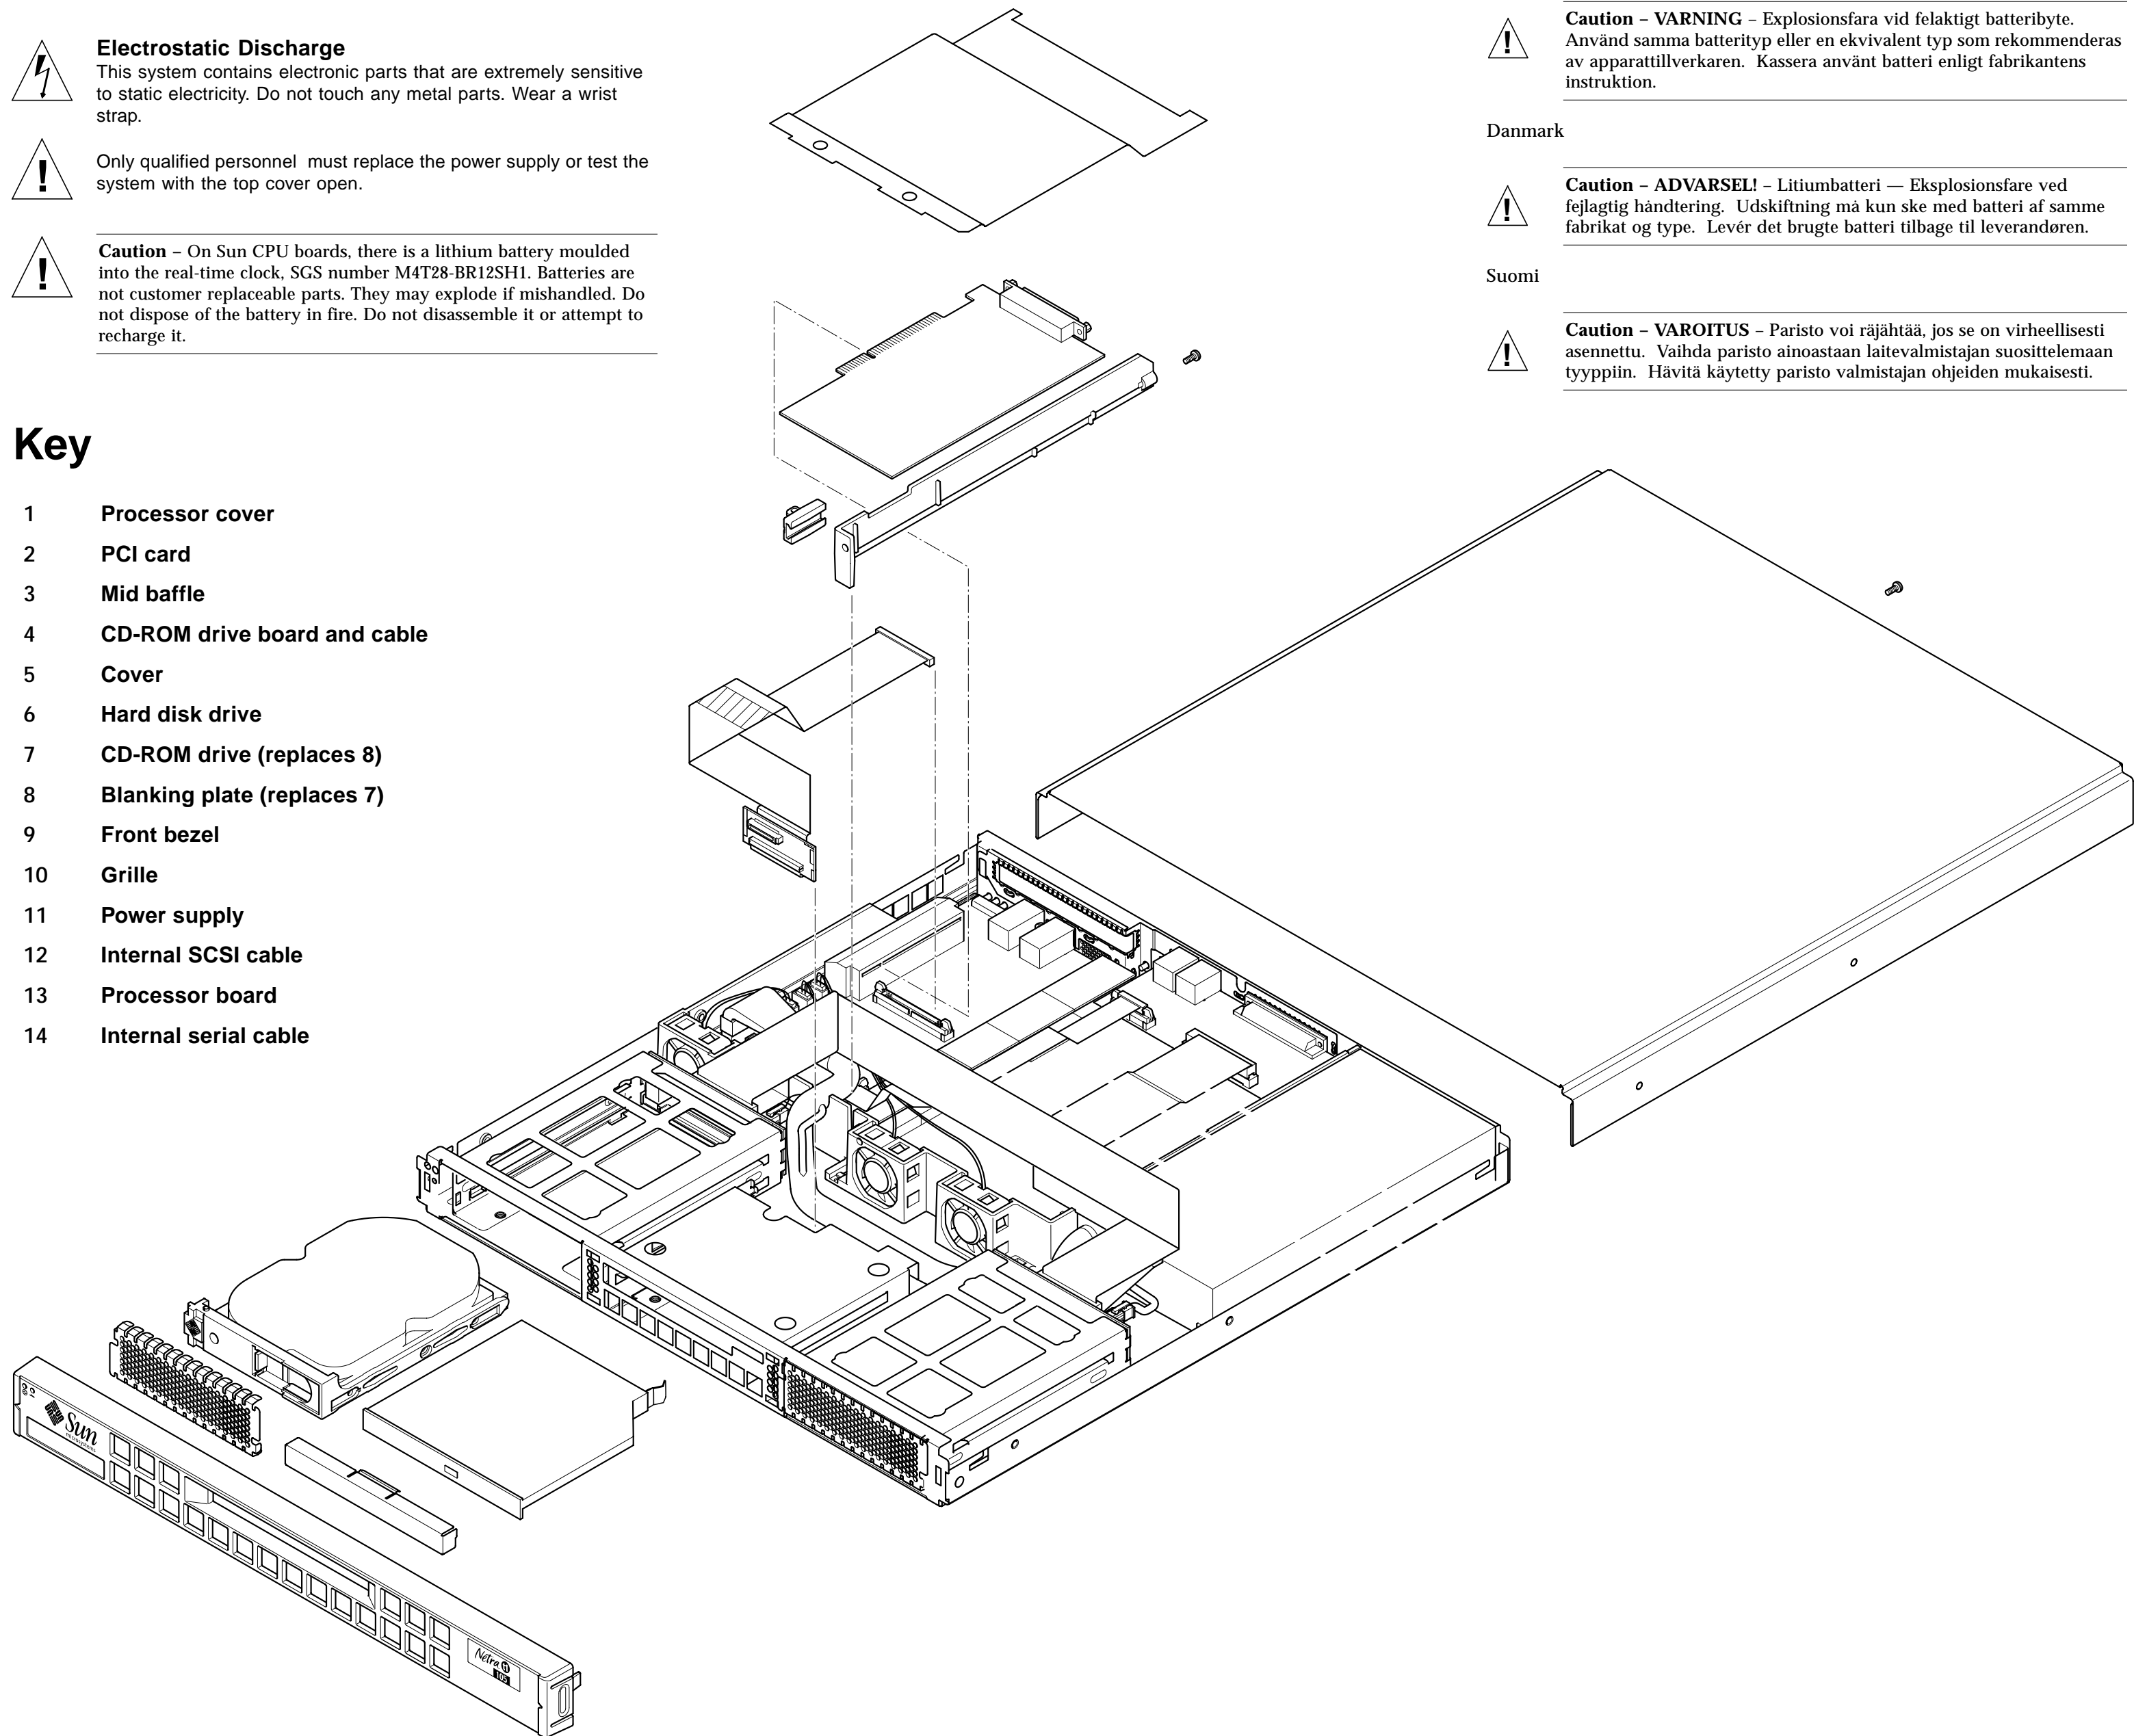

Norge



Caution - ADVARSEL - Litiumbatteri - Eksplosjonsfare. Ved utskifting benyttes kun batteri som anbefalt av apparatfabrikanten. Brukt batteri returneres apparatleverandøren.

Sverige



Caution - VARNING - Explosionsfara vid felaktigt batteribyte. Använd samma batterityp eller en ekvivalent typ som rekommenderas av apparattillverkaren. Kassera använt batteri enligt fabrikantens instruktion.

Danmark



Caution - ADVARSEL! - Litiumbatteri - Eksplosionsfare ved fejlagtig håndtering. Udskiftning må kun ske med batteri af samme fabrikat og type. Levér det brugte batteri tilbage til leverandøren.

Suomi



Caution - VAROITUS - Paristo voi räjähtää, jos se on virheellisesti asennettu. Vaihda paristo ainoastaan laitevalmistajan suosittelemiin tyyppiin. Hävitä käytetty paristo valmistajan ohjeiden mukaisesti.

9

1

2

3

4

5

11

10

6

7

14

13

12

9

8