


# FABRIC (SWITCHES)

```

ext_bus      10 0/8/0/0.1.23.42.0      fcpararray CLAIMED INTERFACE FCP
Array Interface
target      27 0/8/0/0.1.23.42.0.0    tgt        CLAIMED  DEVICE
disk        7  0/8/0/0.1.23.42.0.0.0  sdisk      CLAIMED  DEVICE      HP
A6188A

disk        8  0/8/0/0.1.23.42.0.0.1    /dev/ dsk /c10t0d0 /dev/ rdisk /c10t0d0
A6188A      /dev/ dsk /c10t0d1 /dev/ rdisk /c10t0d1
    
```

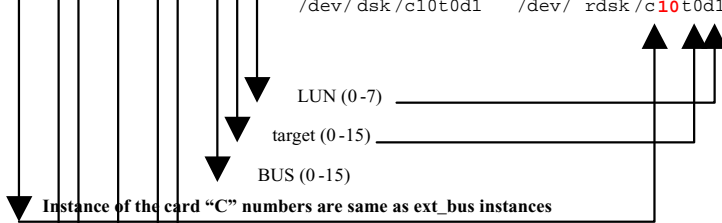

## Port – third byte of N-Port ID

- (1) 42 is in decimal – convert to HEX which is 2a
  - (2) 2a is the AL\_PA
  - (3) Look up 2a in AL\_PA table to find loop ID = 108
- Will be 0 if DFA no loop id required

## Area – second byte of N-Port ID

- (1) 23 is in decimal – convert to HEX which is 17
- (2) Divide the 17 into two nibbles or digits, the "7" means port 7 on switch

## Domain – first byte of N-Port ID

- (1) This is the Switch Domain (do a switchShow to show Domain)
- (2) This will be "0" if no switch

## Card Node

Hardware address of the HBA, also written on back of server